


Umbrella Bracket Fitting instructions on Rear of Buggy seat

1. Fix the plastic bracket to the metal post (Pic 1)
2. With an Alan key, Slacken but do not remove the 2 rear bag bracket fixing screws, enough to slide the flat bar behind it, and remove the central bolt completely (Pic 2 and 3)
3. Push the flat bar behind the bag support so that the central hole lines up with the hole in the back of the seat where you removed the bolt (Pic 4)
4. Line up holes in seat and flat bar and refit bolts, nip up with spanner. Do not over tighten (Pic 5)
5. Nip up 2 rear bag bracket fixing screws to hold lower flat bar (Pic 6).
6. Fix Umbrella holder to top of flat bar, adjust as required.

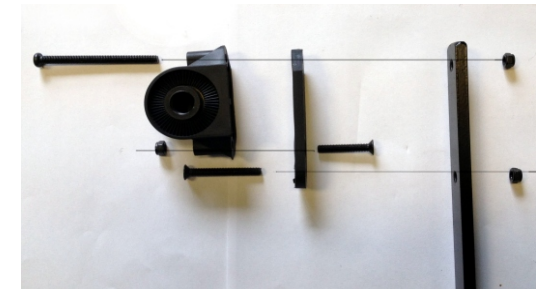

Pic 1

Pic 4



Pic 2



Pic 5



Pic 3



Pic 6